


TECHNICAL SPECIFICATIONS

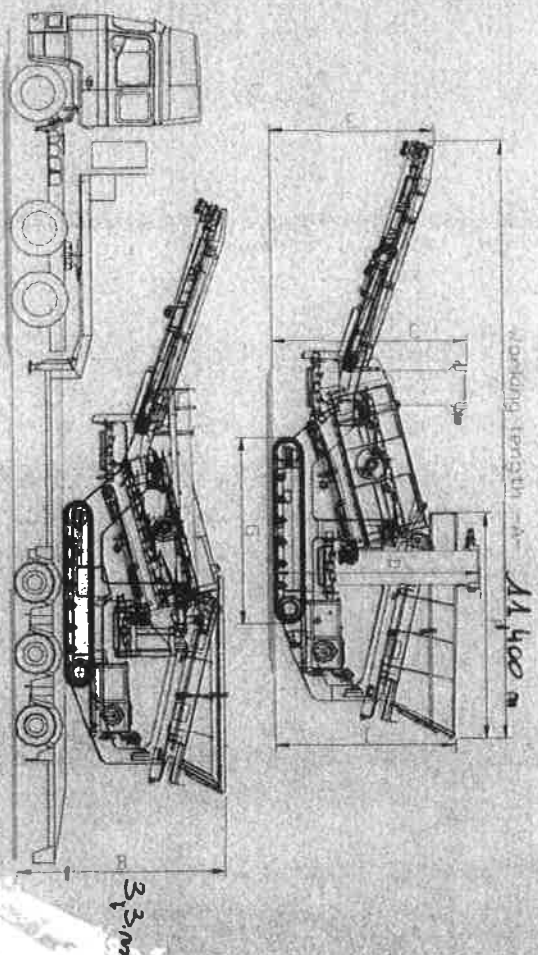

Transport height : 3100 mm - 3.4
 Transport width : 2500 mm - 2.5
 Net transport width : approx. 17 feet
 Transport length : 9900 mm - 4.3

Pos. 1) Feederhopper : 6 m³
 All three hoppers are foldable
 7.34 yards³

Pos. 2) Plate apron feeder
 Full adjustable speed : 0 to 4.8 m/min
 @ 1.6 m/min

Pos. 3) Screenbox
 Length x width : 2700 mm x 1200 mm / 3.24m²
 : hydraulic, 7.5 KW
 10 hp
 9 ft x 4 ft / 36 ft²

Pos. 4) Conveyor belt under the screenbox
 Length x belt width : 3000 mm x 800 mm
 : hydraulic, 4 KW
 10' x 3.2'
 6.6 hp

Pos. 5) Oversize belt
 Length x belt width : 4500 mm / 1000 mm
 15' x 40'

Pos. 6) Slide conveyor left (fines)
 Length x belt width : 8000 mm x 650 mm
 : hydraulic, 7.5 KW
 20' 3" x 2.6'
 10 hp

Pos. 7) Slide conveyor right (mid fines)
 Length x width : 8000 mm x 650 mm
 : hydraulic, 5.5 KW
 20' 3" x 2.6'
 7.5 hp

Pos. 8) Trackdrive
 Length x width : 3550 mm x 400 mm
 11' 7" x 1.6'

Speed : 1 km/h.
 @ 7 mph

Pos. 9) Power unit
 Engine type : Diesel / hydraulic
 : Deutz BF 201, 53.3 KW, 73 hp
 : Sauer/Danfoss, load-sensing

All measurements are approximate.

A	B	C	D	E	F	G	H	I	J	
11400	4000	3600	3750	3000	4300	3550	13350	3350	2300	mm
37'5"	13'1"	11'9"	12'3"	9'10"	14'1"	11'7"	43'7"	11'0"	7'7"	ft. inch